

To The Next Innovation

4PISTON RECOVERY UNIT
QUATTRO
TA110VF-EXP



4PISTON RECOVERY UNIT
QUATTRO
 TA110VF-EXP

Recovery Machine	
Part No	Price
TA110VF-EXP	JPY 375,000

Another level of recovery performance created by 4 pistons and large cooling condenser


Equipped with parallel/series operation switching for maximum recovery efficiency

2 valves with excellent operability

Intuitive operation for switching between series/parallel and opening/closing

Equipped with parallel/series operation switching

Smooth recovery in parallel operation during normal operation, and powerful recovery in high vacuum mode in series operation of bedded-in refrigerant that could not be pulled out due to pressure or refrigerant volume drop.

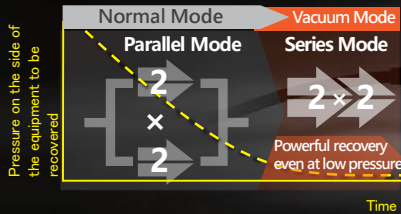

Front

Equipped Back Light
 Large Digital Display




Easy-to-read display of various information such as recovery conditions

Warning function to prevent dissolution of fusible stoppers

Three large-volume fans



Back



Recovery Rate / ASHRAE

600 g/min.

Recovery Rate / R410A(Vapor)

850 g/min.

RecoveryRate (g/min.)	R134a	R22	R410A
Vapor	600	800	850
Liquid	3600	4000	4200
Push-Pull	7500	8500	9500

※R22 gas (gaseous) recovery capacity values are based on ASHRAE STANDARD.

Refrigerant:	R22, R32, R134a, R404A, R407C, R407H, R410A, R448A, R449A, R452A, R463A-J, R1234yf, R1234ze
Power:	220V 50/60Hz
Compressor Type:	1125W(1.5HP)4 piston oil less type
Method:	Gases, semi-liquids and liquids: Compression refrigerant recovery method: In this system, the intake refrigerant is compressed and liquefied by a compressor and sealed in a cylinder.
	Liquid: Push-pull method: Liquid is collected by pressurizing it with a collection machine
Vacuum attainment level:	During continuous operation ... approx. -0.09MPa During automatic shutdown ... approx. -0.03MPa.
Additional Function:	Cleaning Function: Refrigerant treatment function for residual refrigerant in the recovery unit.
Dimensions / Weight	310(H) × 430(W) × 270(D)mm/19.5kg
Operating Temperature	0~39°C
Accessories	◆ 1/4 Charging Hose with ball valve(150cm) × 1 ◆ 3/8 Charging Hose 150cm/30cm × 1 Each ◆ Ball Valve Adapter 1/4 Female × 3/8 Male × 1 ◆ Ball Valve Adapter 3/16 Female × 3/8 Male × 1 ◆ Filter Dryer × 1 ◆ Stickier

R22	R410A	R1234yf	R32	R404A	R407C
R134a	R1234ze	R448A	R449A	R452A	R463A-j

etc

 **ICHINEN TASCO CO.,LTD.**

ADDRESS 1-17-20 Inadauemachi, Higashi-Osaka City, Osaka, 577-0002, Japan
 PHONE +81-6-6748-9310 FAX +81-6-6748-9320
 E-MAIL overseas@tascojapan.co.jp URL <http://www.tascojapan.co.jp/>