

New Arrival

High Performance Vacuum Pump



TA150XL-EXP

TA150XK-EXP

TA150XJ-EXP



ICHINEN **TASCO** CO.,LTD.

TASCO New Standard Model

2-stage rotor in compact body

2-stage rotor in compact body

Anti oil backflow solenoid valve

Spark free components for safe starting operation

The inhaled air is exhausted by two rotors connected in series. Therefore, a large differential pressure is created between the exhaust and intake ports, and a higher vacuum can be obtained than with a single stage. Another reason for obtaining a high vacuum is that the rotor of the first stage is not subjected to reverse pressure load, allowing smooth intake rotation.




Part No: TA150XJ-EXP

For
UP to 20HP
A/C

Air Displacement
3.6 CFM (100ℓ / min)

Ultimate Vacuum
15 microns

Anti Oil Backflow
Solenoid Valve

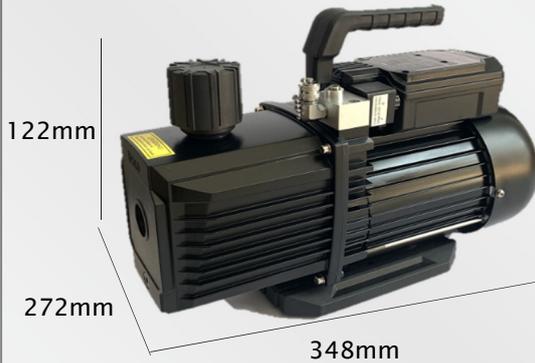

Two
Stage

Weight
8.8Kg

Part No.	TA150XJ-EXP
Free Air Displacement	3.6CFM (100L/min.)
Rotor	Two Stage
Ultimate Vacuum	15 microns
Voltage	220~240V
Motor / RPM	210W / 2880 r.p.m.
Vacuum Pump Oil Capacity	300 ml
Intake Fitting	5/16" (1/2-20UNF)
Dimensions / Weight	258W × 315D × 122H mm / 8.8kg
Accessories	1/4" Male × 5/16" Female adapter (TA159P-4)
Options	Vacuum gauge kit (TA142XK-EXP, TA142VK-2-EXP), Carrying case (TA150CS)


Part No: TA150XK-EXP

For
UP to 20HP
A/C

Air Displacement
5.3 CFM (151ℓ / min)

Ultimate Vacuum
15 microns

Anti Oil Backflow
Solenoid Valve

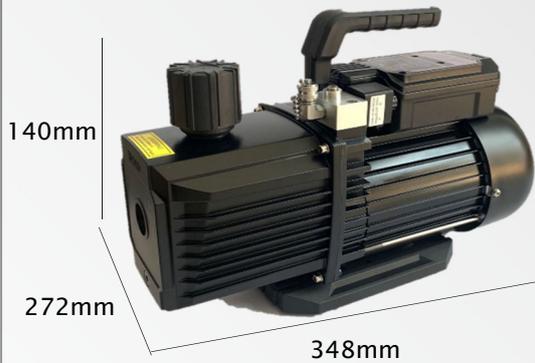

Two
Stage

Weight
11.0Kg

Part No.	TA150XK-EXP
Free Air Displacement	5.3CFM (151L/min.)
Rotor	Two Stage
Ultimate Vacuum	15 microns
Voltage	220~240V
Motor / RPM	360W / 2880 r.p.m.
Vacuum Pump Oil Capacity	540 ml
Intake Fitting	5/16" (1/2-20UNF)
Dimensions / Weight	272W × 348D × 140H mm / 11.0kg
Accessories	1/4" Male × 5/16" Female adapter (TA159P-4), 3/8" Male × 5/16" Female adapter (TA159P-6)
Options	Vacuum gauge kit (TA142XK-EXP, TA142VK-2-EXP), Carrying case (TA150CS-24)


Part No: TA150XL-EXP

For
UP to large size
refrigerator

Air Displacement
8.9 CFM (252ℓ / min)

Ultimate Vacuum
15 microns

Anti Oil Backflow
Solenoid Valve

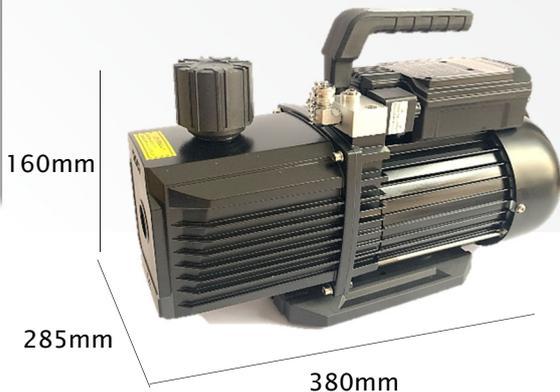

Two
Stage

Weight
14.8Kg

Part No.	TA150XL-EXP
Free Air Displacement	8.9CFM (252L/min.)
Rotor	Two Stage
Ultimate Vacuum	15 microns
Voltage	220~240V
Motor / RPM	500W / 2880 r.p.m.
Vacuum Pump Oil Capacity	640ml
Intake Fitting	5/16" (1/2-20UNF)
Dimensions / Weight	285W × 380D × 160H mm / 14.8kg
Accessories	1/4" Male × 5/16" Female adapter (TA159P-4), 3/8" Male × 5/16" Female adapter (TA159P-6)
Options	Vacuum gauge kit (TA142XK-EXP, TA142VK-2-EXP), Carrying case (TA150ES)